

Cushioned Sensor Mounts


Models	A	B	C	D	E	F	G	H	I	J	O
SN-08	M8 x 1	M16 x 1.5	3.10 (0.12)	0.25 (0.01)	22.0 (0.87)	15.2 (0.60)	5.33 (0.21)	22.1 (0.87)	N/A		8.89 (0.35)
SN-08N									9.51 (0.37)	11.0 (0.43)	
SN-12-LP	M12 x 1	M18 x 1	4.06 (0.16)	0.51 (0.02)	24.0 (0.95)	22.9 (0.90)	6.35 (0.25)	21.1 (0.83)	N/A		12.1 (0.48)
SN-12N-LP									17.3 (0.68)	14.7 (0.58)	
SN-12		M22 x 1.5									
SN-12N								17.3 (0.68)	14.7 (0.58)		
SN-18	M18 x 1	M30 x 1.5	5.10 (0.20)	0.76 (0.03)	35.8 (1.41)	29.7 (1.17)	8.38 (0.33)	29.7 (1.17)	N/A		12.4 (0.49)
SN-18N									17.8 (0.70)	23.9 (0.94)	
SN-30	M30 x 1.5	M47 x 1.5								51.0 (1.72)	43.7 1.72
SN-30N										22.9 (0.90)	38.6 (1.52)

Specifications

The chart at left is for round, threaded models and the bottom chart for block-style models. In each case, model numbers with an "N" after the sensor thread size are for non-shielded sensors and correspond with figures on the right below each chart.

Caps are plastic and mount housings are anodized aluminum or stainless steel. For stainless steel mounts, add an "SS" to the end of the model number (accept model numbers SN-12-LP and SN-12N-LP, which are available only in stainless and do not require the "SS")

"O" in each table signifies the total allowable overtravel.

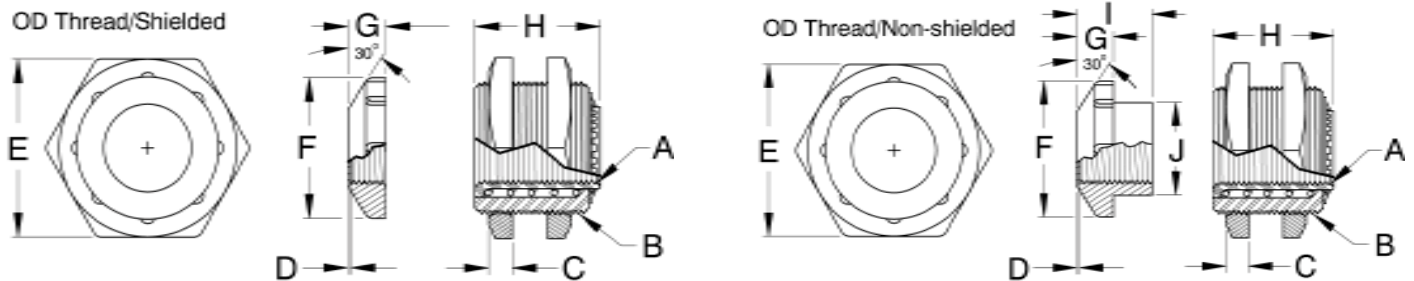

Models	A	B	C	D	E	F	G	H	I	J	K	L	M	O
SNB-08	M8 x 1	19.0 (0.75)	9.52 (0.37)	0.25 (0.01)	15.8 (0.62)	15.2 (0.60)	5.33 (0.21)	22.1 (0.87)	N/A		18.4 (0.72)	25.4 (1.00)	3.58 (0.14)	8.89 (0.35)
SNB-08N									9.51 (0.37)	11.0 (0.43)				
SNB-12	M12 x 1									0.51 (0.02)	25.4 (1.00)	22.9 (0.90)	6.35 (0.25)	22.1 (0.87)
SNB-12N					17.3 (0.68)	14.7 (0.58)								
SNB-18	M18 x 1	25.4 (1.00)	12.7 (0.50)	0.76 (0.03)	31.7 (1.25)	29.7 (1.17)	8.38 (0.33)	29.7 (1.17)	N/A					30.7 (1.21)
SNB-18N									17.8 (0.70)	23.9 (0.94)				
SN-30	M30 x 1.5	34.9 (1.38)	17.5 (0.68)						50.8 (2.00)	43.7 (1.72)	7.62 (0.30)	37.4 (1.47)	N/A	
SN-30N							22.9 (0.90)	38.6 (1.52)						

